Surface Mount, Removable Bollard

- Surface Mount Installation
- Ideal where foundation depth is zero
- In-built locking system
- Easy to lock/unlock
- Cost effective and easy installation

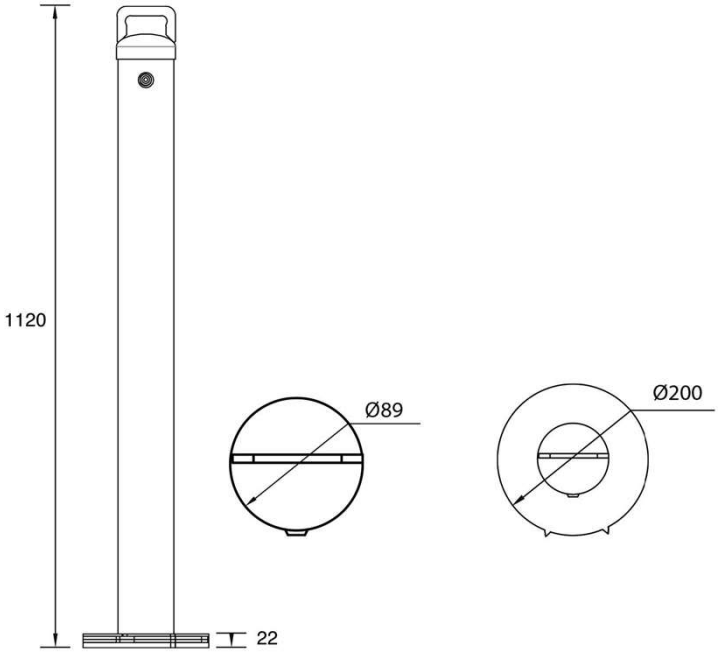

Technical Specs – Surface Mount	
Model Name	EPL/SM/RISL-D-H-F (D=Dia; H=Height; F: Finish)
Diameter	89mm~220mm (Standard 89mm)
Height	650mm~1000mm (Standard 900mm)
Thickness	3mm
Material	Carbon Steel or SS304/SS316
Foundation Depth	Zero (Directly Bolted on to Slab)
Base Plate	110mm Wide x 22mm Height
Locking Mechanism	In-Built on the side of the Bollard
Surface Treatment	Hot dip galvanizing & Powder Coated SS304/SS316; Brushed or Polished

ESCO Pte. Ltd. (Company No.198902778C)
6 Harper Road, #06-08, Leong Huat Building, Singapore 369674
Tel: +65 6744 3100; **Fax** +65 6745 2898;
Customer Service: +65 6743 3343;
HP: +65 9851 7215; **Email:** sanjeev.bhat@esco.com.sg;
Website: www.esco.com.sg